

Helical cutter head with 26 reversible two-sided high **speed steel inserts.** Pre-set depth stop for repeat cuts at 1/8", 1/4", 1/2" & 3/4". Powerful 2 HP 15 A motor with thermal overload protection.





\$1,594.99 reg. \$1,950.00

Excalibur

Deluxe rip fence system included

Deluxe 14" wood cutting bandsaw

12" resaw capacity. Safety foot brake stops blade & motor. Dynamically balanced heavy castiron wheels. 2 cutting speeds, 2300 & 3250 fpm, for excellent results in either hard or soft woods. 3/4" blade included. 1 1/2 HP motor.



Airflow capacity 506 cfm. Sound rating 80 to 85 dB. Equipped with high efficiency 1 micron canister filter. Reusable clear plastic collector bag for improved dust collection efficiency.



Powerful 2 HP motor with built-in brake. Rear wraparound and front ½ disc steel guards. 0 to 45° tilting cast-iron table. Magnetic safety switch with extra-large stop panel and lock-out key.

New! 1000 lb load capacity

0.0

Heavy-duty universal mobile base 50-035

2 heavy-duty 3" wheels. 2 heavyduty swivel casters.

Digital angle indicator 30-180

Ideal for measuring table saw & mitre saw blade angles, jointer fence & bandsaw table tilt.

Distributed by:

* Special edition "K"



Prices are in effect from September 1st, 2012 to February 28th, 2013

We reserve the right to correct any typographical and pictorial errors without notice.





CNC carving Machines

 $13^{''} \times 18^{''}$ (40-913 M1), $24^{''} \times 36^{''}$ (40-915X M1)

Pendant style hand-held controller. Easy to learn i-Picture programming software. Large user-friendly control panel with LCD display, keypad and USB 2.0 port for easy file transfers. Positional accuracy up to 0.001" & variable cutting speeds up to 118" per minute. Aluminum table with integrated hold down clamps. Tool kit with starter cutting tools included. No external operating PC required. Unlimited and ongoing technical support.





40-100M

With MDF table (16" x 27") Complete table kit includes: (1) 40-060, (1) 40-065, (1) 40-047, (1) 40-125 & (1) 40-130.

\$799.99

40-100P

With Phenolic table (16" x 27") Complete table kit includes: (1) 40-060, (1) 40-065, (1) 40-043, (1) 40-125 & (1) 40-130.

\$869.99

40-200M

With MDF table (24" x 32") Complete table kit includes: (1) 40-080, (1) 40-085, (1) 40-049, (1) 40-125 & (1) 40-130.

\$899.99

40-200P

With Phenolic table (24" x 32") Complete table kit includes: (1) 40-080, (1) 40-085, (1) 40-045, (1) 40-125 & (1) 40-130.

\$1,039.99

Deluxe router table kits

40-100 (bench top), 40-200 (floor model)

Heavy-duty massive router lift with 9 $\frac{1}{4}$ " **a luminum top plate.** Stable 4 post/lift screw design & chain drive lifting system controlling all 4 corners simultaneously. Fits all fixed base router motors*. Smooth above-the-table adjustment mechanism for fast tool changes & precision bit setting. Two table sizes available in either cast-iron, MDF or Phenolic. Sturdy steel stands include easy access on/off safety switch with removable lock-out key. Floor model made of tubular steel, includes, mobility kit & adjustable levelling feet. Fence has 2 $\frac{1}{4}$ " and dust collection outlet and adjustable scales. Under table steel dust enclosure with access door, adjustable air vent, power cord grommet and 4" and dust port with 2 $\frac{1}{4}$ " and branch inlet to the fence including 2 $\frac{1}{4}$ " and dust hose and 2 hose clamps.

*Some router models may require reducer collars/adaptors.













Heavy-duty router lift



Universal dust

collection kit









Reducer collar for Excalibur model 40-125 router lift 40-312 40-314

Fits 3 ½" diameter routers

\$6.29

reg. \$9.00

Fits 3 ½" diameter routers

\$6.99

reg. \$9.50





Designed for most routers







10"3 HP cabinet saw (left tilt)

50-270K M1

Quick release combination riving style splitter and blade guard with anti-kickback pawls and a second European style riving knife also included. Extra large precision-ground 42" x 29" cast-iron table including two 11" full cast-iron extension wings. See-through blade guard with built-in dust outlet. Convenient cabinet mounted magnetic switch with overload protection. High precision General "T-Fence" system with 50" long rails.




10"3 HP cabinet saw (left tilt)

50-275RLK M1

Powerful 3 HP motor with multi-groove V-belt. Combination riving style splitter and see-through blade guard with anti-kickback pawls, and a second European style riving knife also included. Large precision-ground 44" x 27" cast-iron table with two extension wings. Magnetic safety switch with large stop button.



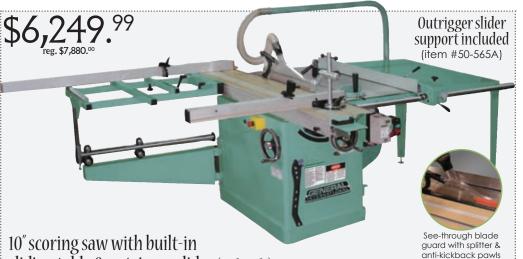

sliding table & outrigger slider (right tilt)

Can be used as a regular saw, but includes a built-in sliding table for stable effortless crosscuts & a separate scoring blade for chip free cuts in melamine & laminates. Anodized European style sliding table. Separate safety lock out switch for main motor & scoring motor. Solid cast-iron table with anodized aluminum coating. Heavy-duty cabinet-mounted cast-iron trunnions.

Precision-built rip fence system with 50" guide rails. 3 HP motor.



Dust collection from cabinet & blade





Heavy-duty cast-iron construction. Perfect fit on right or left tilt table saws. Large handles for better operator control.

Excalibur Aluminum T-fence reg. \$1,250.00

10" 2 HP cabinet saw (left tilt)

50-200R M1

Quick release combination riving style splitter and blade award with antikickback pawls and a second European style riving knife also included. Large 44" x 27" cast-iron table with two extension wings. Cast-iron cabinet mounted trunnions. Equipped with a sturdy, easy adjust, T-fence rip fence system. Dual voltage motor pre-wired for 230 V operation.

10" contractor saw (50-090RC) / 10" job site saw (50-090RK) (left tilt)

Combination riving style splitter and see through blade guard with anti-kickback pawls, and a second European style riving knife also included. Heavy-duty, precision cast-iron ribbed table, with miter gauge T-slots, & stamped steel extension wings. Deluxe, quick adjusting miter gauge. Sturdy fixed leg steel stand (50-090RC). Folding stand with wheels (50-090RK). 2 HP motor.



24 tooth - rip blade (#55-100).

(1) 50 tooth - combination blade (#55-105).

(1) 80 tooth - fine cut-off blade (#55-115). (1) Convenient & sturdy storage case.



Micro-adjustment attachment for T-fence

Fits General MFG F-36 homeshop & F-42 industrial T-fence.







\$1,249.99

\$1,459.99

Sliding tables

Fits on most 10" to 14" table saws.

50-STL40P (not shown)

Easy to adjust, extruded aluminum miter fence for accurate miters from 0° to 50°. Cut up to 49"* with the crosscut fence positioned at the rear of the table. Crosscut and miter up to 28"* with the fence at the front of table.

50-STL60P (shown)

Easy to adjust, extruded aluminum miter fence for accurate miters from 0° to 45°. Cut up to 72"* with the crosscut fence positioned at the rear of the table. Crosscut or miter up to 49"* with the fence at the front of the table.

* Depending on the positioning of the main mounting bracket on your saw.



Miter angle adjustment rail with positive

stop pin

10" 2 HP hybrid saw with 48" excalibur sliding table

50-220REX40 M1

Onboard storage

mounts for cross cut fence

Complete table saw and sliding table package includes 2 HP left tilt model 50-220R M1 saw with Excalibur T-fence and Excalibur 50-SLT40P sliding table system in place of the left side table extension wing.



Solid triangular design for tight miter joints. Sliding flip-up stop. Easy to read index graduations. Patented extension arm assembly makes it quick & easy to find any angle and lock it securely in place.



12" radial arm saw

Powerful 2 HP 220V single phase TEFC motor. Cast-iron frame, heavy steel column and sturdy stand. Tilting pivoting head allows for crosscuts, bevels, miters & rip cuts. Precision adjustable indexing with positive stops at 90°, 45° and 22.5°. 5%" arbor with 1" spacer bushing included.

50-EXBC10 (10") 50-EXBC14 (12" - 14") \$469.99 reg. \$550.00

Excalibur SY CENERAL INTERNATIONAL

Overarm blade cover system with dust collection capability

50-EXBC10 (10") / 50-EXBC14 (12"-14")

Unique design mounting bracket: pivots arm away or removes completely in seconds. 4" main boom and 3" inner boom. Flexible 3" hose connects the blade cover to the boom.



GENERAL

Excalibui

Deluxe rip fence system included

17"wood/metal bandsaw

90-320 M1

Electronic variable speed digital inverter. Dynamically balanced cast-iron wheels. Solid, high quality, precision machined, ribbed cast-iron table with 5° left and 45° right tilting action. Blade speeds: 540 to 3600 fpm (wood) & 100 to 650 fpm (metal). 2 HP motor.






Deluxe rip fence system included



Short cut-off feed device keeps fingers safely away from the blade



Deluxe 18" heavy-duty wood cutting bandsaw 90-290 M1

Heavy-duty one-piece frame.

Safety foot brake simultaneously slows down the blade and disconnects electrical circuit for quick blade stoppage and emergency shut-off. 2 blade speeds: 2820 & 3936 fpm. 3 HP motor.



\$969.99 reg. \$1,200.00

14" wood cutting bandsaw

90-125 M1

3/8" blade included.

Cast-iron frame & precisionbalanced aluminum wheels with replaceable rubber tires. Rip fence & miter gauge included. 2 blade speeds: 1800 & 3000 fpm. Blower device. 1 HP motor.

Optional riser attachment 90-130 for 90-125 only \$87.99 reg. \$140.00



14" wood cutting bandsaw 90-140 M1

> 3/8" blade included. Castiron frame and precisionbalanced aluminum wheels. Safety lock-out switch with removable key. 2 blade speeds: 1630 & 2730 fpm. 1 HP motor.

Optional riser attachment 90-130A for 90-140 only \$87.99

90-075A Excalibul \$149.99 Universal bandsaw rip fence system 21" fence & 29"(front rail) & 25 3/4" (rear rail). Fits on General International models: 90-100, 90-125, 90-140, 90-170.



Tables can be adjusted up or down for full belt use. Graphite backing reduces belt friction for longer belt life. Dynamically balanced 7" rubber drive roller and crowned 3" idler roller to ensure solid belt tracking. 2 HP motor.

6" x 108" oscillating vertical edge belt sander

Same features as model 15-010 M1 + oscillating feature.



Built-in

(15-035DC M1 only)



24" horizontal single drum sander - 2 HP

15-150 M1

3 to 20 fpm variable feeding speed (conveyor belt). Steel frame and heavyduty base for greater stability. High quality conveyor belt for longer service life. Magnetic safety switch. 2 HP motor.



24" horizontal double drum sander - 3 HP

15-250 M1

Two 5" diameter aluminum drums. High quality conveyor belt for long service life. Magnetic safety switch. 3 to 20 fpm variable feeding speed (conveyor belt). 3 HP motor.




Oscillating spindle sander

(bench top model) 15-220 M1

Precision ground cast-iron tilting table. 29 oscillations per minute. 5 interchangeable spindles including 1/4", 1/2", 5/8", 1 1/2" & 2". 1720 rpm spindle speed. ½ HP motor.



Oscillating spindle sander (floor model)





Grinders



Belt sander operates horizontally and vertically and can be locked at any angle in between. 3450 rpm grinding speed. 4900 fpm belt speed. 1/3 HP motor.



Low speed bench grinder 15-625 M1 (6") / 15-825 (8")

Low 1725 rpm. Double sealed ball-bearing construction. Adjustable aluminum tool rests (15-625). Ajustable cast tool rests (15-825). 1/4 HP motor for 15-625 & 1/2 HP for 15-825.



Double sealed ball-bearing construction. Variable speed for grinding or sharpening. 2000 to 3450 rpm. 110 V motor.



6" x 48" belt & 12" disc sander

15-015 M1

Tilting cast-iron tables. Sanding belt operates at any angle from horizontal to vertical. Belt speed of 1570 lin. fpm. Disc speed of 2000 rpm. 1 HP, 110/220 V motor.







12" x 17" variable speed "Maxi-Lathe VS+"

25-200 M1

Headstock pivots 360° with 180° positive stop for outboard turning. Forward/reverse switch. Digital spindle speed display. Quick lock control levers easily position tool rest. Maximum distance of 17 % between centers. 3 variable speed ranges: 300 to 900, 600 to 1800 & 1200 to 3600 rpm. ¾ HP motor.



Maximum distance of 49" between centers with optional bed extension (25-205).







Maximum distance of 40" between centers with optional bed extension (25-116).

\$3,569.99 reg. \$4,200.00

8" parallelogram jointer

80-225HC M1



Large surface 82 % cast-iron tables. Heavy-duty center-mounted cast-iron fence with 45°, 90° and 135° positive stops. Precision four point parallelogram table adjustment system. Magnetic safety switch mounted above the in-feed table for quick, easy access. 5000 rpm cutter head speed. 3 HP motor.



Variable speed 14" x 30" wood lathe 25-300QC M1

Quick release belt tension lever for faster. easier speed changes. Electronic inverter for 2 variable speed ranges: 170 to 1200 rpm & 500 to 3600 rpm. Headstock pivots 360° with positive stops at 45°, 90°, 135° and 180° for multiposition outboard turning. Maximum distance of 30" between centers. 1 HP motor.



\$2,249.99



Variable speed 16" x 43" wood lathe 25-650ABC M1

Electronic variable speed. Specifically designed and built for professionals who want superior performance. Headstock swivels 360° with

positive stops at 0°, 45°, 90°, 135°, 180° & 270° and quick-lock for outboard turning. Electronic inverter for variable speed adjustment between 45 & 3750 rpm. Digital spindle speed (rpm) readout. Quiet, highly efficient, low power consumption 2 HP motor.



Extruded aluminum base and carriage. Smooth hand wheel controlled rack & pinion system. High speed steel



4 piece wood turning chisel set The ultimate wood chisel set

25-215: 3/4" diamond parting tool 25-220: 1/2" round nose scraper 25-225: 1" skew chisel

25-230: 1/2" bowl gouge 25-235: wooden case



5 piece wood turning mini-chisel set with solid hardwood handles

25-255: 1/8" gouge

25-260: 1/4" gouge

25-265: 3/32" parting tool

25-270: 1/4" round nose scraper

25-275: 1/4" skew chisel

25-280: wooden case

Designed specially for smaller turning such as pen making and other small hobby type projects.

80-100LM1 6" closed base jointer

55 1/4" long tables. Large surface, ground cast-iron tables. Cast-iron fence with 90° & 45° positive stops. Independent in-feed and out-feed table adjustment handwheels. 5000 rpm cutter head speed. 1 HP motor.



6" closed base jointer with Magnum helical head

Same features as model 80-100L M1 + Magnum helical head.


8" jointer

74 1/8" extra long tables. Large surface, ground cast-iron tables. Independent in-feed & outfeed table adjustment handwheels. Magnetic switch for added safety. 5500 rpm cutter head speed. 2 HP motor.



8" jointer with Byrd style helical head

Same features as model 80-200L M1 + Byrd style helical head.





6" stroke

5379.99 reg. \$470.∞

14" drill presses

75-030 M1 (bench top model) / 75-150 M1 (floor model)

5%" chuck with key, laser line marker & see-through chuck guard included.
Rotating, 45° tilting, crank-operated worktable with quick release clamp.
Forced opening line interrupter switch, requires machine restart in case of power failure or circuit interruption.
Built-in lamp illuminates the drilling area (bulb not included). 12 spindle speeds: 280 to 3000 rpm. ½ HP motor.





Line interrupter switch



75-200RC M1

%" chuck with key, laser line marker & see-through chuck guard included.

Rotating, 45° tilting, crank-operated worktable with quick release clamp. Forced opening line interrupter switch, requires machine restart in case of power failure or circuit interruption. 12 spindle speeds: 340 to 2800 rpm. ³/₄ HP motor.

\$629.99



Radial arm drill press

%" chuck with key & see-through chuck guard included. 3 V_8 " spindle travel. 9 spindle speeds: 295 to 3580 rpm. Table swivel 360°. Forced opening line interrupter switch, requires machine restart in case of power failure or circuit interruption. Table extension provides additional support. ½ HP motor.

17" extended stroke drill press

3/4" chuck with key. Laser line marker & seethrough chuck guard included. Extra long 6" quill stroke drills deeper than most drill presses. Large front mounted paddle style stop switch with lock-out safety feature to prevent unwanted or unintentional start-up. 12 spindle speeds: 255 to 2750 rpm. 1 HP motor.



22" drill press

3/4" chuck with key, laser line marker & seethrough chuck guard included. Cast-iron pulleys reduce vibration. Large front mounted paddle style stop switch with lock-out safety feature to prevent unwanted or unintentional start-up. Industrial 1 HP motor.



Mortising attachment kit

Convert almost any drill press into a mortiser in minutes! Contents: Mounting hardware. Cast-iron chisel holder. Guide fence with workpiece hold down. 4 of the most commonly used mortising chisel and bit sets with 5/8" bit shank x 1/4", 5/16", 3/8" & 1/2". Includes 52, 55, 58, 60, 65 and 66 mm adapter bushings.



Portable pocket hole jig Adjustable variable hole-to-centerline distances. Fixed toggle clamp holds stock

firmly in place. Cast base with 4 mounting holes. Durable 3/8" step drill bit with adjustable depth stop collar. Kit includes 25 each: 5/8", 1", 1 1/4", 1 1/2" self-tapping screws.



Self-centering pen drilling vise

Self-centering design for quick effi-cient dead-center pen blank drilling. Drill pen blanks of up to 1" square.



70-300 \$14.99 reg. \$25.40

Laser pointer for drill press Can be installed on most drill presses.



70-152 (52 mm): for 34-01, 34-02,

34-10, 34-111 & 34-121

70-155 (55 mm): for 75-025, 75-030, 75-125, 75-150, 75-160

& 75-550


70-165 (65 mm): for 75-100 & 75-200

70-175 (75 mm): for 75-260, 75-500

Mortisers

⁵/₈" hollow chisel mortisers

1/4", 5/16", 3/8" & 1/2" chisel & bit sets included. Includes sleeves for both 5/8" and 3/4" chisel shanks.



75-050T M1

Features a tilting head (30° left & right) with a 180° swivel. ½ HP TEFC motor.

75-040 M1

Large table with telescopic extensions. Heavy-duty castiron construction. Adjustable workpiece stop & fence mounted hold-down. 1/2 HP TEFC motor.



\$1,699.99

13 spindle boring machine

Fully adjustable fence system with easy to read scales in both inches and metric for quick setup and accurate boring. Work stops on either end of the fence allow operator to line up work from the left or right for performing parallel boring patterns. Heavy-duty cast-iron construction, machined with precision. Open base steel stand included. 3450 rpm spindle speed. Powerful 1 ½ HP motor delivers plenty of power and speed for multiple hole boring even in the toughest laminates.





\$290.99 $_{\text{reg.}}$ \$340.00 75-070 Optional closed stand

for mortiser Fits on models 75-050T & 75-075 only.



7" molder

30-120 M1

Magnetic 2-step safety switch to prevent unwanted or unintentional start-up is equipped with an extralarge stop panel and a lock-out key. Cast-iron table and head. Precision machined heavy-duty castiron dovetailed column. Independent, variable speed feed motor provides added control. 7000 rpm cutter head speed. 2 HP motor.



15" single surface planer

\$2,114.99

2 feed speeds: 16 & 20 fpm. Magnetic safety switch. Triple V-belt drive for greater power. Built-in mobile base. 3 HP motor mounted in cabinet for protection from dust.









30-050

Dial-gauge micrometer knife alignment

*Note: All CFM ratings tested under resistance to simulate typical shop usage.



15" single surface planerwith Magnum helical

Same features as model 30-125CE M1 + Magnum helical head.

Dust collectors





Portable cyclone dust collector

-11/2 HP

10-800CF M1

Airflow capacity 611 cfm*. Equipped with 1 micron canister filter. Caster mounted for portability. 1 ½ HP industrial rated motor. Remote controller included.



2 stage dust collector - 5 HP

Airflow capacity 3800 cfm*. Equipped with two ultra efficient 1 micron canister filters. 2 piece caster mounted 45 gallon (55 U.S. gallon) drum included. 5 HP motor.



Dust collector -10 HP

10-750CF M2, M3

Airflow capacity 4900 cfm*. Sound rating 85 dB. Equipped with 1 micron canister filters. 10 HP motor



2 stage dust collector - 7½ HP

10-875CF M2, M3

Airflow capacity 4955 cfm*. Equipped with two ultra efficient 1 micron canister filters. 2 piece caster mounted 45 gallon (55 U.S. gallon) drums included. 7 1/2 HP

\$3,319.99 reg. \$4,290.00

20" single surface planer

Built-in mobile base with one-step lock-pedal.

2 feed speeds: 16 & 20 fpm. Large cast-iron extension wings. Magnetic safety switch. 5 HP motor.





(4 rows, total: 58 inserts)

20" single surface planerwith Magnum helical

Same features as model 30-300 M1 + Magnum helical head.

20" single surface planer

Positive gear design for quick and accurate table adjustments. 2 feed speeds: 22 & 28 fpm. Built-in table rollers reduce friction. Equipped with a sectioned in-feed roller and a rubber out-feed roller. 7 ½ HP motor.





(4 rows, total: 58 inserts)

20" single surface planerwith Magnum helical head

Same features as model 30-360 M1, M2, M3 + Magnum helical head.

Portable dust

collector - 1 HP

Airflow capacity of 700 cfm*. Dust hood

rotates 360°. Support

arm extends to 12".

10-050 M1



\$679.99

reg. \$950.00

Dust collector with canister filter

-1½ HP

10-105CF M1

Airflow capacity 1100 cfm*. Sound rating 80 to 85 dB. Equipped with 1 micron canister filter.



\$469.99 reg. \$650.00

Dust collector - 1 1/2 HP

10-105 M1

Same features as #10-105CF with washable, extra fine 2 micron filter bag replacing canister filter.



\$874.99

reg. \$1,150.00

Dust collector with canister filter -2 HP

10-110CF M1

Air flow capacity 1550 cfm*. Sound rating 80 to 90 dB. Equipped with 1 micron canister filter.



\$619.99 reg. \$820.00

Dust collector - 2 HP

10-110 M1

Same features as #10-110CF with washable, extra fine 2 micron filter bag replacing canister filter.



Dust collector - 1 HP

10-005 M1

Air flow capacity 647 cfm*. Sound rating 75 to 80 dB. washable, extra fine 2 micron filter bag.



\$1,329.99 reg. \$1,900.00

Dust collector with canister filter -3 HP

10-210CF M1

Air flow capacity 2280 cfm*. Sound rating 85 to 95 dB. Equipped with 1 micron canister filters.



Dust collector - 3 HP 10-210 M1

Same features as #10-210CF M1 with washable, extra fine 2 micron filter bags replacing canister filters.



"Super Turbo" air cleaning system

10-600 M1

Airflow Capacity of 700, 900, 1250 cfm. 2 stage filtration. 5 preprogrammed timer settings (2, 4, 6, 8 hours & continuous). 1/3 HP motor.

54" x 59" x 95" **Dust collection** fire protection cage 10-420

15

















20-200 M1

3 rollers. 4 speeds: 20, 26, 33 & 43 fpm (6, 8,10 &13 mpm). ½ HP motor.





82 pc plastic peg board Ishop organizer set (Item #95-082)

Tools & parts not included

A \$49.00 Value *With the purchase of 95-060 only 95-060 \$779.99 reg. \$990.∞

60" x 30" oak workbench with steel legs

Solid 1" thick table top with 3" apron. Includes both front and end vises with a double row of bench dog holes in the table for each vise. Large storage drawer. Sturdy adjustable height (33"- 39") steel legs.



Included accessories





Flexible expandible roller stand

Maximum load capacity of 200 lb. Adjustable height from 23" to 36". 9 nickel-plated 1 ½" × 13 ½" rollers. 50" maximum expanded length. 14 ¾" compacted length. 4" wheels with locking foot levers.



\$50-167\$ \$329.99 reg. \$395.00

Flexible expandible 2-way heavy-duty roller stand

Maximum load capacity of 400 lb. Adjustable height from 24 ½" to 37". 9 nickel-plated 2 ½" x 20" 2-way rollers. 51 ½" maximum expanded length.

Wet / dry vacuum cleaner

Stainless steel tank 10 gallon capacity. 2 speed motor. Rated for heavy-duty maintenance and janitorial use. 2 stage air filtration. 1 ½ HP motor

Cyclonic tank kit

Ideal for small shops: Can be used with any shop vacuum or small dust collector with $1 \frac{1}{2}$ ", $2 \frac{1}{2}$ " or 4" inlets, to create a portable 2-stage dust collection system.

Included accessories: (1) 6 gallon caster-mounted drum. (1) 2-stage cyclone/separator lid. (2) Hoses with $3 \times 2 \frac{1}{2}$ " adapter fittings. (1) $2 \frac{1}{2}$ " - 4" reducer fitting. (1) $1 \frac{1}{2}$ " - $2 \frac{1}{2}$ " reducer fitting. (1) 4" clamp. (1) $2 \frac{1}{2}$ " clamp.



The 6" digital caliper can make quick, accurate, inside and out-side diameter measurements and can convert instantly between inches and metric measurements.



25′ (7.5 m) measuring tape



Shapers \$1,649.99

³/₄" spindle shaper

14. % 1/2" router bit adapters included. 2 spindle speeds with reverse: 8000 & 10,000 rpm. Magnetic switch with thermal overload protection. 3 HP motor.



1¼" production shaper

40-350 M1

4 spindle speeds with reverse: 4000, 6000, 8000 &

10,000 rpm. Magnetic switch with thermal overload protection. Built-in retractable castor system. 5 HP motor.



Pneumatic overarm router

40-850 M1 Adjustable pneumatic up and down feed speed control. 6 adjustable depth settings. Includes 4 router adapters (3 ¼", 3 2/64", 3 ½" & 4 13/64") to fit most 1 ½ HP to 3 ½ HP

portable routers.
Router not included.



16