



Paslode®

360°

Complete Product Guide



The background of the page is a collage of images related to construction fasteners. On the left, there's a close-up of a red Paslode tool. On the right, there's a stack of metal nails with the Paslode logo and 'RounDrive' branding. At the bottom right, a grey and orange Paslode tool is shown in use, driving a nail into a wooden surface.

Why Paslode?

Innovation.

Paslode has an extensive history of bringing innovative solutions to the construction industry.

Paslode introduced the first pneumatic nailer, cordless framing nailer, and Positive Placement[®] metal connector system, and has led the way in fastener technology with products like RounDrive[®] 30° papertape collated nails and Hot Dipped Galvanized Plus - the first corrosion-resistant fastener coating for treated lumber.

Today, Paslode's latest innovations include complete fastening systems that consistently improve the user experience and increase jobsite productivity.

Quality.

Paslode is committed to excellence, and stands by its products. Paslode leverages decades of expertise in tool and nail manufacturing to deliver products that are made under the highest quality standards in the industry.

Reputation.

With more than 75 years of experience, Paslode is the standard by which other pneumatic and cordless fastening systems are measured.

Our products are widely used by professionals for framing, sheathing, trim and finish applications, fencing, floor and roof decking, siding, and insulation.



Application	Cordless Tools					Pneumatic (Air) Tools											
	CF325Li	IM250A Li	16ga. Straight Trim	18ga. Brad	16ga. Stapler	PF350	F350S	F250S-PP	PF150S-PP	16ga. Angled Trim T250A-F16	16ga. Straight Trim T250S-F16	18ga. Brad T200-F18	Roofers' Choice R175-C	Construction Stapler S150-W16R	Insulation Sheathing Stapler	Framing Stapler S200-S16	CapStapler CS150
Framing																	
Exterior Walls	•					•	•										
Interior Walls	•					•	•										
Rafters	•					•	•										
Joists	•					•	•										
Metal Hardware								•	•								
Headers	•					•	•										
Blocking	•					•	•										
Bridging	•					•	•									•	
Floor Decks	•					•	•										
Roof Decks	•					•	•										•
Punchout	•					•	•										
Assembly/Sheathing																	
Plywood	•					•	•									•	•
Gypsum Wallboard															•		
Soft Wall													○	○	•	•	
Polystyrene													○	○	•		
Lathing													○	○	•	•	
Soffits	•			•	•	•	•										•
Fascias	•			•	•	•	•										•
Trim/Finish																	
Bead Paneling		•	•	•						•	•	•					
Baseboards		•	•	•						•	•	•					
Crown Molding		•	•	•						•	•	•					
Cap and Shoe		•	•	•						•	•	•					
Door and Window Jambs		•	•	•						•	•	•					
Door and Window Casings		•	•	•						•	•	•					
Chair Rail Molding		•	•	•						•	•	•					
Roofing																	
Roofing Felt													•	•	•		•
Asphalt/Fiberglass Shingles														•	•		
Cedar Shingles	•					•	•										
Siding/Exterior																	
Housewrap														•	•		•
Wood	•					•	•										
Cedar and redwood	•					•	•										
Hardboard	•					•	•										
Vinyl																	△
Exterior Fences	•					•	•										•
Recreational Decks	•					•	•										
Remodeling	•	•	•	•	•												

○ +

Always check with local building codes for fastener compliance



FRAMING Cordless System

CF325Li Li-ion Cordless Framing Nailer LI·ION

Li-ion battery technology drives up to 6,000 nails per charge

Fully charged in 1 hour; 2 minute quick charge will drive up to 200 nails

Holds charge 5x longer

Use with
Fuel + Nail Combo Packs



- **Portable.**
Freedom on the jobsite - no hoses or compressors.
- **Powerful.**
Drives 3"-3 1/4" nails in the toughest lumber.
- **Lightweight.**
Better balance reduces arm fatigue.
- **Heavy-duty.**
Durable design and sturdy rafter hook built for taking jobsite abuse.

Tool Specifications

Model	CF325Li
Part #	902600
Weight	7.25lbs w/battery
Nail Capacity	1 strip (48 nails)
Nail Range	2" - 3 1/4"
Nail Type	30° Paslode RoundDrive®
Fuel Type	Orange quicklode™ Spare Fuel Cell (part# 816008)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and charger (part# 902667)
Battery Life	6,000 nails per charge
Cleaning Interval	Up to 50,000 nails
Warranty	1-year full warranty. 5-year extended (see operating manual for details).



**1 YEAR
FULL
WARRANTY**



Assembled in the USA

Cordless Framing Fuel + Nail Combo Packs

Part #	Length	Diameter	Shank	Finish	#/Carton
650564	2"	.113"	Ring	GalvGuard™	1,000
650526	2 3/8"	.113"	Ring	GalvGuard™	1,000
650522	2 3/8"	.113"	Smooth	Brite	1,000
650523	2 3/8"	.113"	Ring	Brite	1,000
650565	2 3/8"	.113"	Ring	Brite	3,000
650527	3"	.120"	Ring	*GalvGuard™	1,000
650563	3"	.120"	Smooth	*GalvGuard™	1,000
650524	3"	.120"	Smooth	*Brite	1,000
650631	3"	.120"	Smooth	*Brite	3,000
650525	3"	.131"	Smooth	*Brite	1,000
650566	3"	.131"	Smooth	*Brite	3,000
650535	3 1/4"	.131"	Smooth	*Brite	1,000
650630	3 1/4"	.131"	Smooth	*Brite	3,000
650611	3-1/4"	.131"	Smooth	*GalvGuard™	1,000

*Features **POWERBOOST** for consistent drive performance in LVL.

Fuel + Nail Combo Packs include adapters that allow quicklode™ fuel cells to be used with **ALL Paslode Cordless Framing nailers!**

PF350S PowerFramer™ 30° Pneumatic Framing Nailer



Powerful.
Sinks nails into LVL every time.

Lightweight.
Less arm fatigue. Work faster.

Durable.
New rugged design withstands tough jobsites.

Compact Design.
Fits into more tight spots.

Tool-less Nail Adjustment.
Changes nail depth in an instant.

Tool Specifications

Model	PF350-S
Part #	502000
Weight	7.5 lbs
Nail Capacity	84 (2 strips)
Nail Range	2" - 3½"
Nail Type	30° RoundDrive® and Clipped Head Nails
Op Pressure	80-120 psi (5.5-8.3 bar)
Air Req./80 psi	.082/cycle
Warranty	5-year limited warranty. 1-year full warranty (see operating manual for details).



Assembled in the USA

F350-S PowerMaster Plus™ 30° Pneumatic Framing Nailer



Durable Construction.
Requires less maintenance.

Reliable.
An absolute workhorse.

Compact Size.
Fits between studs.

Adjustable Rafter Hook.
Moves out of the way when not in use.

Soft Grip Handle.
For ultimate comfort.

Tool Specifications

Model	F350-S
Part #	501000
Weight	8.4 lbs
Nail Capacity	84 (2 strips)
Nail Range	2" - 3½"
Nail Type	30° RoundDrive® and Clipped Head Nails
Op Pressure	80-120 psi (5.5-8.3 bar)
Air Req./100 psi	.082/cycle
Warranty	90-day limited on wear parts. 1-year limited on magazine parts. 5-year limited on housing and cap (see operating manual for details).



Assembled in the USA



FRAMING Nails


RounDrive® 30° Framing Nails - Brite New and Improved!



- Reinforced round head design for better drive performance
- 10% more nails per strip means less reloading
- Rigid and compact strips are more durable and easier to handle

Part #	Length	Diameter	Shank	Finish	#/Carton
650272	2"	.113"	Smooth	Brite	5,500
650273	2"	.113"	Ring	Brite	5,500
405253	2 1/2"	.131"	Smooth	Brite	3,000
650237	2 3/8"	.113"	Smooth	Brite	5,000
650238	2 3/8"	.113"	Ring	Brite	5,000
650836	3"	.120"	Smooth	Brite	2,500
650810	3"	.131"	Smooth	Brite	2,500
650839	3 1/4"	.131"	Smooth	Brite	2,500

RounDrive® 30° Framing Nails - Hot Dipped Galvanized Plus

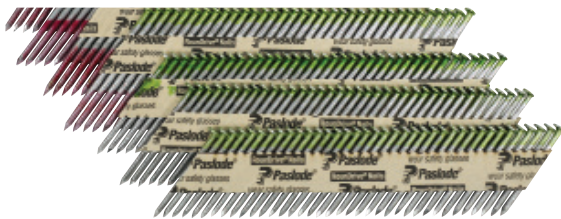

Independently proven as the leader in galvanized fastening!

- Approved for use in all exterior applications
- Head coating reduces staining and streaking by 80% compared to traditional Hot Dipped Galvanized nails
- Code approved for use in pressure treated lumber

650381	2"	.113"	Ring	Hot Dipped Galvanized Plus	2,000
650382	2 3/8"	.113"	Smooth	Hot Dipped Galvanized Plus	2,000
650383	2 3/8"	.113"	Ring	Hot Dipped Galvanized Plus	2,000
650384	3"	.120"	Smooth	Hot Dipped Galvanized Plus	2,000
650385	3"	.120"	Ring	Hot Dipped Galvanized Plus	2,000
650386	3"	.131"	Smooth	Hot Dipped Galvanized Plus	2,000
650387	3"	.131"	Ring	Hot Dipped Galvanized Plus	2,000
650388	3 1/4"	.131"	Smooth	Hot Dipped Galvanized Plus	2,000
650474	3 1/4"	.131"	Ring	Hot Dipped Galvanized Plus	2,000
650475	3 1/2"	.131"	Ring	Hot Dipped Galvanized Plus	2,000
650476	3 1/2"	.131"	Smooth	Hot Dipped Galvanized Plus	2,000

Clipped Head 30° Framing Nails

097969	2 3/4"	.120"	Smooth	Brite	3,500
097970	2 3/4"	.120"	Ring	Brite	3,500
097978	3 1/4"	.131"	Ring	Brite	2,500
097987	3 1/2"	.131"	Smooth	Brite	2,500
401548	2 1/4"	.113"	Smooth	Heat Treated	4,000



METAL CONNECTOR Nailers

PF150S-PP Positive Placement® Metal Connector Nailer



Durable and powerful for tough jobsite conditions.

Lightweight, compact design fits in tight spaces.

2-strip magazine - high capacity, less reloading.

Non-slip cushioned grip provides comfort and control.

Probing tip locates nail hole quickly - work faster.

Tool Specifications

Model	PF150S-PP
Part #	502300
Weight	6.3 lbs
Nail Capacity	44-47 (2 strips)
Nail Range	1½"
Nail Type	Positive Placement® Metal Connector Nails - Smooth (heat treated) Brite and Mechanically Galvanized
Air Req./100 psi	.082/cycle
Op Pressure	90-120 psi (6.2-8.3 bar)
Warranty	90-limited on wear parts. 6 mos. limited on magazine parts. 1 year limited on housing cap and parts (see operating manual for details).



Assembled in the USA

F250S-PP Positive Placement® Metal Connector Nailer



Faster.
3x faster than hand nailing.

Accurate.
Probing tip locates hole quickly and easily.

Saves Money.
Increases productivity, lowers install costs.

Durable.
Lower maintenance, fewer moving parts.


Tool Specifications

Model	F250S-PP
Part #	500855
Weight	8.5 lbs
Nail Capacity	2 strips
Nail Range	1½" - 2½"
Nail Type	Positive Placement® Metal Connector Nails - Smooth (heat treated) Brite and Mechanically Galvanized
Air Req./100 psi	.082/cycle
Op Pressure	80-120 psi (5.5-8.3 bar)
Warranty	90-day limited on wear parts. 6 month limited on magazine parts. 1 year limited on housing and cap (see operating manual for details).



Assembled in the USA

Positive Placement[®] Metal Connector Nails

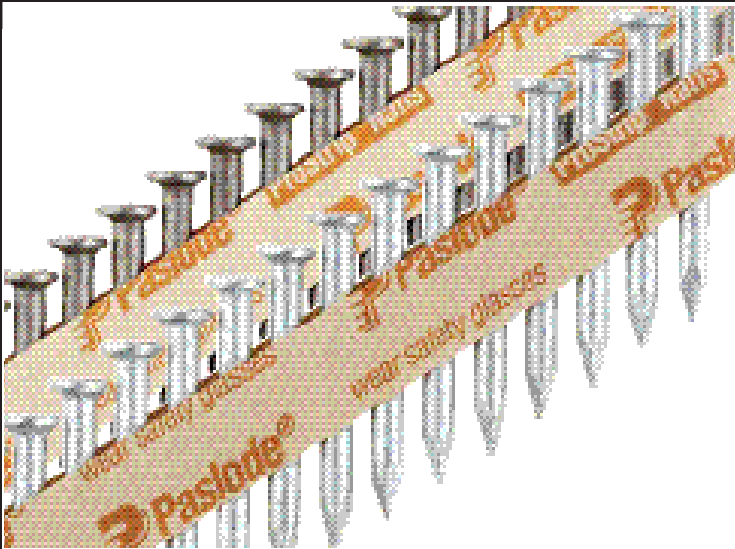

- Head marked for easier nail identification during inspections
- Specially designed to reduce nail bending when driven into metal hardware
- Available in galvanized for corrosion resistance (ACQ approved)
- ICC-ES Recognized, ER-2126

Brite Positive Placement[®] Metal Connector Nails

Part #	Length	Diameter	Finish	#/Carton
650025	1 1/2"	.131"	Brite, Heat Treated	4,000
650645	1 1/2"	.131"	Brite, Heat Treated	1,000
650026	1 1/2"	.148"	Brite, Heat Treated	3,000
650646	1 1/2"	.148"	Brite, Heat Treated	1,000
650199	2 1/2"	.131"	Brite, Heat Treated	2,500
650027	2 1/2"	.148"	Brite, Heat Treated	2,500
650028	2 1/2"	.162"	Brite, Heat Treated	2,000

Mechanical Galvanized Positive Placement[®] Metal Connector Nails

Part #	Length	Diameter	Finish	#/Carton
650197	1 1/2"	.131"	Mechanical Galv, Heat Treated	4,000
650014	1 1/2"	.148"	Mechanical Galv, Heat Treated	3,000
650106	2 1/2"	.148"	Mechanical Galv, Heat Treated	2,500
650198	2 1/2"	.162"	Mechanical Galv, Heat Treated	2,000



Cordless Stapler 16 gauge Standard Crown





Portable.
No hoses or compressors to drag around.

Lightweight & well-balanced.
Increased productivity.

Precise.
Depth-of-drive adjustment provides control of staple depth.

Convenient.
Quick clear feature provides easy access to nose to reduce downtime.

Tool Specifications

Model	Cordless 16 ga. Stapler
Part #	900078NT
Weight	6.3lbs w/battery
Staple Capacity	150 (2 strips)
Staple Range	3/4" - 2"
Staple Type	16 gauge, standard crown (1/2")
Fuel Type	quicklode™ Trim Fuel Cell (Part #816007)
	
	Use w/adapter (Part# 902550)
Staples per Fuel Cell	Approx. 2,400
Battery	NiCad Stick Battery (part# 402500)
	
Battery Life	4,000 staples per charge
Warranty	1-year limited warranty. 5-year extended (see operating manual for details).



Assembled in the USA

S200-S16 16 gauge Standard Crown Air Stapler



Versatile.
Great for floor decking, plywood sheathing and insulation.

Durable.
Built for everyday use.

Convenient.
Easy reload and reduced staple waste.

Compact & Lightweight.
Increased maneuverability.

Tool Specifications

Model	S200-S16
Part #	501230
Weight	4.9 lbs
Applications	Floor decking, sheathing, insulation
Staple Capacity	150
Staple Range	3/4" - 2"
Staple Type	16 gauge, Standard Crown (1/2")
Air Req./100 psi	.040/cycle
Op Pressure	80-120 psi (5.5-8.3bar)
Warranty	1-year limited warranty (see operating manual for details).




Assembled in the USA



16 Gauge Staples Standard Crown

For use with and Cordless Standard Crown and S200-S16 Staplers

- Special coating bonds to wood for superior holding power
- Also available in galvanized - for corrosion protection
- Extra strong - won't fall apart if dropped

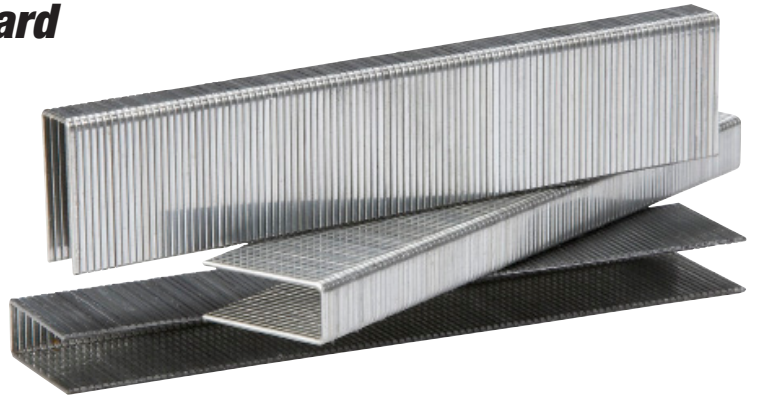

16 Gauge Brite Standard Crown Staples

Part #	Length	Wire	Crown	Finish	#/Carton
400026	1"	16 gauge	1/2"	Brite	16,500
400027	1 1/4"	16 gauge	1/2"	Brite	13,500
400028	1 1/2"	16 gauge	1/2"	Brite	10,500
400029	1 3/4"	16 gauge	1/2"	Brite	9,000
400030	2"	16 gauge	1/2"	Brite	7,500

16 Gauge Galvanized Standard Crown Staples

Part #	Length	Wire	Crown	Finish	#/Carton
OT5240	3/4"	16 gauge	1/2"	Galvanized	21,000
OT5242	1"	16 gauge	1/2"	Galvanized	16,500
OT5243	1-1/8"	16 gauge	1/2"	Galvanized	15,000
OT5238	1-1/4"	16 gauge	1/2"	Galvanized	13,500
OT2695	1-1/2"	16 gauge	1/2"	Galvanized	10,500
OT2250	1-3/4"	16 gauge	1/2"	Galvanized	9,000
OT2258	2"	16 gauge	1/2"	Galvanized	7,500



STAPLERS

Wide Crown

S150-W16R Construction Stapler



- Durable. Extended bumper life for increased productivity.
- Saves time. Drives up to 12 staples per second.
- Convenient. Easy reload and reduced staple waste.
- Lightweight & well-balanced. Easier on the arm.

Tool Specifications

Model	S150-W16R
Part #	501270
Applications	Wire Lath, Housewrap, Roofing
Weight	4.9 lbs
Staple Capacity	150
Staple Range	5/8" - 1½"
Staple Type	16 gauge, Wide Crown (15/16")
Air Req./100 psi	.040/cycle
Op Pressure	80-120 psi (5.5-8.3bar)
Warranty	1-year limited warranty (see operating manual for details).



Assembled in the USA

S200-W16 Insulation Sheathing Stapler



- Versatile. Great for Housewrap, Insulation, Wire Lath, and Sheathing
- Durable. Extended bumper life for increased productivity.
- Convenient. Easy reload and reduced staple waste.
- Lightweight & well-balanced. Easier on the arm.

Tool Specifications

Model	S200-W16
Part #	501265
Applications	Housewrap, Insulation, Wire Lath, Sheathing
Weight	4.9 lbs
Staple Capacity	150
Staple Range	¾" - 2"
Staple Type	16 gauge, Wide Crown (15/16")
Air Req./100 psi	.040/cycle
Op Pressure	80-120 psi (5.5-8.3bar)
Warranty	90-day, 1-year limited (see operating manual for details).



Assembled in the USA

16 Gauge *Wide Crown Staples*



For use with and S150-W16R and S200-W16 Staplers

- Wider crown for superior holding power
- Extra strong - won't fall apart if dropped
- Galvanized for corrosion protection

Part #	Length	Wire	Crown	Finish	#/Carton
0T2851	5/8"	16 gauge	15/16"	Galvanized	25,500
404068	3/4"	16 gauge	15/16"	Galvanized	9,000
404069	7/8"	16 gauge	15/16"	Galvanized	9,000
404070	1"	16 gauge	15/16"	Galvanized	9,000
404071	1-1/4"	16 gauge	15/16"	Galvanized	9,000
0T2855	1-1/2"	16 gauge	15/16"	Galvanized	10,500
650098	1-3/4"	16 gauge	15/16"	Galvanized	9,000
403471	2"	16 gauge	15/16"	Galvanized	7,500



CAPSTAPLER and FasCaps

CS150 CapStapler



- Consistent drive performance - Save time on roofing felt and housewrap
- Easy loading - Open design makes staple and cap reloading a snap
- Lightweight - Easy on the arm
- In-line magazine - Increased balance and control
- Versatile - easily switch from caps to staples
- High capacity canister - Holds 240 caps per spool and 90 staples

Tool Specifications

Model	CS150
Part #	502575
Applications	For Housewrap, Roofing Felt, Plastic Sheathing
Weight	4.8 lbs
Cap Capacity	240 Caps/Spool
Staple Capacity	90
Staple Range	3/4" - 1-1/2"
Staple Type	18 gauge, 3/8" crown
Op. Pressure	70-110 psi (4.8-7.6 bar)
Warranty	1-year full warranty. 5-year extended (see operating manual for details).

FasCaps 18 gauge, 3/8" Crown Galvanized Staples

- Designed for residential building applications
- Greater holding power - prevents tearing
- Caps provide water-tight seal
- Available in 1" or 1-1/2" staple lengths (master pack contains 6 packs):

18 gauge | 3/8" Crown | Galvanized

650592 | 1" | 1,680 FasCaps per pack

650597 | 1-1/2" | 1,440 FasCaps per pack





TRIM

16 Gauge Angled Nailers

LI·ION Cordless 16 Ga. Angled Trim Nailer

Li-ion battery technology drives 50% more nails per charge (6,000 nails)



Use with **Fuel+ Nail Combo Packs**

Save time, work anywhere. No hoses or compressors to drag around.

Precise & compact. Angled magazine reaches tight spots and allows precise placement.

Reliable power. Drives nails in the hardest woods without wood damage.

Lightweight & well-balanced. Easy on the arms.

Tool Specifications

Model	IM250A Li
Part #	902400
Weight	4.5lbs w/battery
Nail Capacity	100 (2 strips)
Nail Range	1-1/4" - 2-1/2"
Nail Type	16 gauge, 20° Collation Angle
Fuel Type	quicklode™ Trim Fuel Cell (Part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and charger (part# 902667)
Warranty	5 year limited warranty. 1-year full warranty (see operating manual for details).



1 YEAR FULL WARRANTY



Assembled in the USA

T250A-F16 Finish Trim Nailer



Precise & compact. Angled magazine reaches tight spots and allows precise placement.

Reliable power. Drives nails in the hardest woods without wood damage.

Lightweight & well-balanced. Easy on the arms.

Professional results. 16 gauge reduces wood-splitting and nail visibility.

Tool Specifications


Model	T250A-F16
Part #	500910
Weight	3.8 lbs
Nail Capacity	100 (2 strips)
Nail Range	1-1/4" - 2 1/2"
Nail Type	16 gauge, 20° Collation Angle
Air Req./80 psi	.040/cycle
Op Pressure	80-120 psi (5.5-8.3 bar)
Warranty	90-day limited on wear parts. 6 month limited on magazine parts. 1 year limited on housing and cap (see operating manual for details).



Assembled in the USA



16 Gauge Galvanized Angled Trim Nails

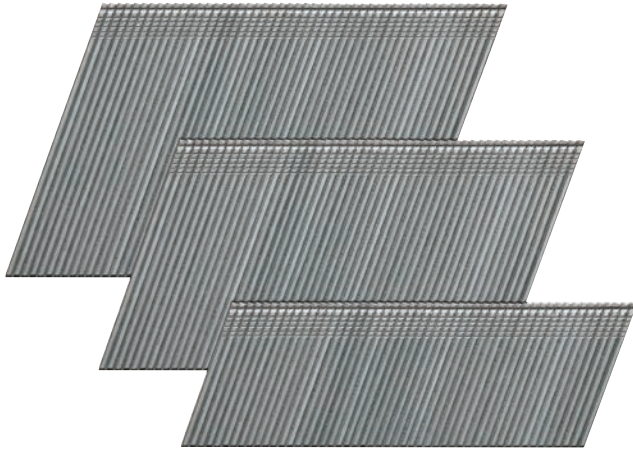

For use with Cordless 16 gauge Angled Trim Nailer and T250A-F16 Trim Air Nailer

- Chisel point reduces wood splitting
- Galvanized for corrosion protection
- 16 gauge size is ideal for any finish work
- Consistent drivability

Part #	Length	Gauge	Finish	Shank	#/Box	Boxes/Carton
650230	1-1/4"	16 gauge angled	Galvanized	Smooth	2,000	6
650231	1-1/2"	16 gauge angled	Galvanized	Smooth	2,000	6
650046	1-3/4"	16 gauge angled	Galvanized	Smooth	2,000	6
650047	2"	16 gauge angled	Galvanized	Smooth	2,000	6
650232	2-1/2"	16 gauge angled	Galvanized	Smooth	2,000	6

16 Gauge Galvanized Angled Trim Fuel+Nail Packs



For use with Cordless 16 gauge Angled Trim Nailer

- The perfect amount. Less waste - less chance for carrying expired fuel.
- All in one box. Matched fuel and nail quantities in one convenient package.
- Lower out-of-pocket cost for smaller jobs.

Part #	Length	Gauge	Finish	Shank	#/Box	Boxes/Carton
650719	2"	16 gauge angled	Galvanized	Smooth	1,000	6
650720	2-1/2"	16 gauge angled	Galvanized	Smooth	1,000	6



TRIM

16 Gauge Straight Nailers

Cordless 16 Ga. Straight Trim Nailer



Save time, work anywhere. No hoses or compressors to drag around.

Precise & compact. reaches tight spots and allows precise placement.

Reliable power. Drives nails in the hardest woods without damage.

Lightweight & well-balanced. Easy on the arms.

Tool Specifications

Model	Cordless 16 Gauge Straight Trim Nailer
Part #	902000
Weight	4.9lbs w/battery
Nail Capacity	100 (2 strips)
Nail Range	3/4" - 2-1/2"
Nail Type	16 gauge, Straight Collation
Fuel Type	quicklode™ Trim Fuel Cell (part# 816007)



Battery NiCad Oval Battery (Part# 404717)



Warranty 90-limited on wear parts, 1 year limited warranty (see operating manual for details).



Assembled in the USA

T250S-F16 Trim Air Nailer



Precise & compact. Reaches tight spots and allows precise placement.

Reliable power. Delivers consistent drive energy.

Lightweight & well-balanced. Easy on the arms.


Professional results. Nail lockout prevents misdrives and surface damage.

Tool Specifications

Model	T250S-F16
Part #	501680
Weight	3.9lbs
Nail Capacity	100 (2 strips)
Nail Range	3/4" - 2-1/2"
Nail Type	16 gauge, Straight Collation
Air Req./80 psi	.040/cycle
Op Pressure	80-120 psi (5.5-8.3 bar)
Warranty	90-day limited on wear parts. 6 month limited on magazine parts. 1 year limited on housing and cap (see operating manual for details).



16 Gauge Galvanized Straight Trim Nails

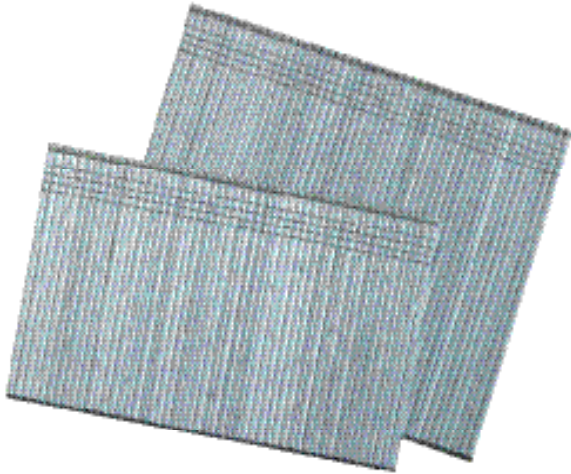

For use with Cordless 16 gauge Straight Trim Nailer and T250S-F16 Trim Air Nailer

- Chisel point reduces wood splitting
- Galvanized for corrosion protection
- 16 gauge size is ideal for any finish work
- Consistent drivability

Part #	Length	Gauge	Finish	Shank	#/Box	Boxes/Carton
650282	1-1/4"	16 gauge straight	Galvanized	Smooth	2,000	6
650283	1-1/2"	16 gauge straight	Galvanized	Smooth	2,000	6
650284	1-3/4"	16 gauge straight	Galvanized	Smooth	2,000	6
650285	2"	16 gauge straight	Galvanized	Smooth	2,000	6
650287	2-1/2"	16 gauge straight	Galvanized	Smooth	2,000	6



TRIM

18 Gauge Brad Nailers

Cordless 18 Ga. Brad Nailer



Save time, work anywhere. No hoses or compressors to drag around.

Precise & compact. Reaches tight spots and allows precise placement.

Reliable power. Drives nails in the hardest woods without wood damage.

Lightweight & well-balanced. Easy on the arms.

Tool Specifications

Model	Cordless 18 Gauge Brad Nailer
Part #	901000
Weight	4.9lbs w/battery
Nail Capacity	100 (2 strips)
Nail Range	5/8" - 2"
Nail Type	18 gauge, Straight Collation
Fuel Type	quicklode™ Trim Fuel Cell (Part# 816007) 
Battery	NiCad Oval Battery (Part# 404717) 
Warranty	90-limited on wear parts. 1 year limited warranty (see operating manual for details).
	Assembled in the USA

T200-F18 Brad Air Nailer



Precise & compact. Reaches tight spots and allows precise placement.

Reliable power. Drives nails in the hardest woods without damage.

Lightweight & well-balanced. Easy on the arms

Professional results. 18 gauge reduces wood splitting and nail visibility.

Tool Specifications

Model	T200-F18
Part #	500959
Weight	2.1 lbs
Nail Capacity	100 (2 strips)
Nail Range	5/8" - 2"
Nail Type	18 Gauge, Straight Collation
Air Req./80 psi	.095/cycle
Op Pressure	70-100 psi
Warranty	90-day limited on wear parts. 6 month limited on magazine parts. 1 year limited on housing and cap. (see operating manual for details).



18 Gauge Galvanized Brad Nails



For use with Cordless 18 gauge Brad Nailer and T200-F18 Brad Air Nailer






- Chisel point reduces wood splitting
- Galvanized for superior corrosion resistance
- 18 gauge size is ideal for premium workmanship

Part #	Length	Gauge	Finish	Shank	#/Box	Boxes/Carton
650212	1"	18 gauge	Galvanized	Smooth	2,000	6
650213	1-1/4"	18 gauge	Galvanized	Smooth	2,000	6
650214	1-1/2"	18 gauge	Galvanized	Smooth	2,000	6
650215	2"	18 gauge	Galvanized	Smooth	2,000	6

Accessories

Part #	Product	Description	Associated Product(s)
404717	Ni-cad Oval Battery	 2 hour charge; 4,000 nails per charge	901000 - Cordless 18 Gauge Brad Nailer 902000 - Cordless 16 Gauge Straight Trim Nailer
402500	Ni-cad Stick Battery	 2 hour charge; 4,000 staples per charge	900078NT - Cordless 16ga. Stapler
902654	Li-ion Battery	 1 hour charge; 6,000 nails	902600 - CF325Li Framing Nailer and 902400 - IM250A Li Angled Trim Nailer
900200	Ni-cad Battery Charger	 2 hour charge time	404717 - Oval Battery 402500 - Stick Battery
902667	Li-ion Battery Charger	 1 hour charge time	902654 - Li-ion Battery
900507	Ni-cad Auto Adapter Charger	 Use with 900200 battery charger	900200 - Ni-cad Battery Charger
902666	Li-ion Auto Adapter Charger	 Use with 902667 battery charger	902667 - Li-ion Battery Charger
219348	Cordless Tool Cleaner	 12oz. bottle	All Paslode® Cordless tools
401482	Cordless Nailer Lubrication Oil	 4oz. bottle	All Paslode® Cordless tools
403720	Pneumatic Nailer Lubrication Oil	 16oz. bottle	All Paslode® pneumatic (air) nailers

Accessories

Part #	Product	Description	Associated Product(s)
219236	No-Mar Tips	 Prevents damage to wood; 3-pack - Angled	900600 - Cordless 16ga. Angled Trim Nailer (discontinued)
219226	No-Mar Tips	 Prevents damage to wood; 3 pack - Straight	902000 - Cordless 16ga. Straight Trim Nailer
901252	No-Mar Nose	 Protects wood surfaces; Tool-Free adjustment	Cordless Framing Nailers
502234	No-Mar Nose	 Protects wood surfaces	502000 - PF350-S PowerFramer
219228	No-Mar Nose	 Protects wood surfaces	501000 - F350-S PowerMaster Plus

Fuel Cells and Fuel Accessories



816007 - quicklode™ Trim Fuel Cell
Use with all Cordless Finish Nailers (902400, 901000, 902000) and Cordless Standard Crown Stapler (900078NT) with adapter (902550)



816000 - Tall Red Fuel Cell
Use with discontinued IMCT model Cordless Framing Nailer (900420)



816008 - Spare Orange quicklode™ Fuel Cell (formerly item# 816005)
Use with CF325Li (902600), discontinued CF325 (902200), or discontinued IMCT model Cordless Framing Nailer (900420)



902550 - Spare Yellow Fuel Adapter
Use in Cordless Standard Crown Staplers (900078NT) with quicklode™ Trim Fuel (816007)



For More Information

To learn more about our products, visit www.Paslode.com, or call us at **800-669-5228**.

Paslode®, RoundDrive®, and Positive Placement® are all registered trademarks of Illinois Tool Works, Inc.

PowerBoost™, quicklode™, PowerFramer™, PowerMaster Plus™, and GalvGuard™ are all trademarks of Illinois Tool Works, Inc.

11.13.13

