


STEEL STUDS ANGLE IRON* FLAT BAR*
 CHANNEL* EMT CONDUIT ALL-THREAD**

*Sólo acero dulce con pared de máximo 3mm (1/8") de espesor.
 **Acero dulce únicamente. Diámetro de máximo 25,4mm (1").



See package for warnings.
 Consulte el paquete para las advertencias.
 Consultez paquet pour les avertissements.

MAX RPM 9,000
 ROTATION ROTACION

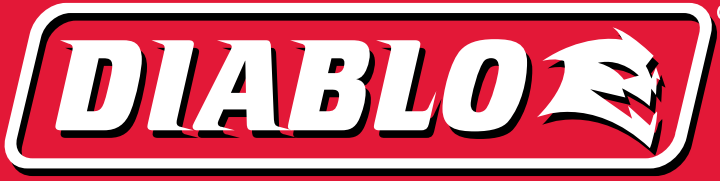

STEEL DEMON™

REDEFINING
 METAL CUTTING

STEEL DEMON™

- fast and accurate cuts
- lasts up to 3X times longer*
- clean, burr-free cuts
- reduces sparks

*Cermet-tipped blade performance versus carbide-tipped blades

Item #	Dia.	Teeth	Arbor	Kerf	Plate	Tool Use	Max. Cut Thickness
D0530F	5-3/8" / 137mm	30	5/8"	.059"	.040"	5-3/8" Circular Saws - 5/8" Arbor with 10mm bushing	1/8"
D0530FM	5-3/8" / 137mm	30	20mm	.059"	.040"	For Panasonic® & Similar Metal Cutting Saws	1/8"
D0648F	6-1/2" / 165mm	48	5/8"	.071"	.051"	6-1/2" Circular Saws - 5/8" Arbor	1/8"
D0649F	6-3/4" / 172mm	48	20mm	.071"	.051"	6-3/4" Circular Saws - 20mm Arbor	1/8"
D0738F	7-1/4" / 182mm	38	5/8"	.102"	.087"	7-1/4" Circular Saws - 5/8" Arbor	3/8"
D0738FM	7" / 180mm	38	20mm	.102"	.087"	For Evolution®, Jancy®, Morse®, & Similar Metal Cutting Saws	3/8"
D0748F	7-1/4" / 182mm	48	5/8"	.102"	.087"	7-1/4" Circular Saws - 5/8" Arbor	1/8"
D0748FM	7" / 180mm	48	20mm	.102"	.087"	For Evolution®, Jancy®, Morse®, & Similar Metal Cutting Saws	1/8"
D0756F	7-1/4" / 182mm	56	5/8"	.102"	.087"	7-1/4" Circular Saws - 5/8" Arbor	1/8"
D0770F	7-1/4" / 182mm	70	5/8"	.071"	.051"	7-1/4" Circular Saws - 5/8" Arbor	18 ga. or thinner
D0770FM	7" / 180mm	70	20mm	.071"	.051"	For Evolution®, Jancy®, Morse®, & Similar Metal Cutting Saws	18 ga. or thinner
D0842CF	8" / 203mm	42	5/8"	.071"	.055"	8" Low RPM Metal Cutting Saws	1/4"
D1260CF	12" / 305mm	60	1"	.095"	.071"	12" Low RPM Metal Cutting Saws	1/4"
D1472CF	14" / 350mm	72	1"	.095"	.071"	14" Low RPM Metal Cutting Saws	1/4"

Freud America, Inc
 218 Feld Avenue
 High Point, NC 27263



Item # LIT4007 Print 06/15

0 08925 03510 7



STEEL DEMON™

Diablo's Steel Demon® blades deliver precise cuts in ferrous metals including steel studs, steel pipe, steel sheet, angle iron and more. These blades are specially designed with unique features to maximize cutting life and speed while providing cool, burr-free cuts.



Triple Chip Metal Cutting Grind
Designed to maximize life, speed, and durability, giving burr-free cuts in metal cutting applications.



Laser-Cut Stabilizer Vents
Trap noise and vibration, stabilize the blade, and deliver cool & accurate cuts.



Tri-Metal Shock Resistant Brazing
Three metal brazing system allows the carbide tips to withstand extreme impact for maximum durability.



Perma-SHIELD® Coating
Non-stick aluminum alloy coating shields the blade against heat, and corrosion.



Laser-cut Body
Precise, high strength steel blade for ultimate life and precision.



TiCo™ Hi-Density Carbide
Withstands impact, reduces wear, and lasts longer than standard carbide in metal cutting applications.

DIABLO® STEEL DEMON™

D0842CF
8"
203mm



Arbor/Arbre/Eje
Ø 5/8" /po/pulg.
42 Teeth
Dientes



With **CERMET III CARBIDE**

FOR FERROUS METALS* / Metales ferrosos*
STEEL STUDS ANGLE IRON* FLAT BAR*
CHANNEL* EMT CONDUIT ALL-THREAD**

*1/4" Max. Wall Thickness (mild steel only).

*Sólo acero dulce con pared de máximo 3mm (1/8") de espesor.
**Acero dulce únicamente: Diámetro de máximo 25,4mm (1").

**1" Max. Diameter (mild steel only).



See package for warnings.
Consulte el paquete para las advertencias.
Consultez paquet pour les avertissements.

MAX RPM 9,000
ROTATION ROTACIÓN

DIABLO® STEEL DEMON™



748F
5/8" Arbor

7 1/4"
182mm

48 Teeth
Dientes
Dents

MAX RPM
ROTATION ROTACIÓN

FOR FERROUS METALS*:

STEEL STUDS ANGLE IRON* FLAT BAR*
CHANNEL* EMT CONDUIT ALL-THREAD**

*Mild Steel Only - 1/8" Max. Wall Thickness. *Mild Steel Only - 1/4" Max. Diameter.



WARNING:
WEAR EYE PROTECTION
ADVERTENCIA:
Protéjase siempre los ojos
ATTENTION:
Portez toujours un appareil
de protection des yeux

DARE TO COMPARE

CARBIDE FOR 40X CUTTING LIFE VS. ABRASIVE DISC



CERMET FOR 3X CUTTING LIFE VS. CARBIDE



.....Lasts Up To **3X** Longer